

SKB / ROB

Sweeper Roller / Rotor Brush

The SKB Sweeper Roller is the perfect tool for levelling slopes, lawns, gravelled areas, etc. Available for Loaders as well.


The ROB Rotor Brush is used to clean smaller areas or to level gravel etc. Both for excavators with 1 -20 t / 2200 - 44000 lbs operating weight.

SKB:

- **Wide range of widths:** 300 mm - 3000 mm / 11.81 to 118.11 in available, equipped with 300 mm / 11.81 in bristles.
- **Efficiency:** can be equipped with different brushes for different applications. The same frame can be used for different rollers.
- **Rotating brush** levels slopes, lawns, gravelled areas, etc.

ROB:

- **Flexible:** different brushes available (steel or synthetic bristles, rubber hoses) for all jobs. Cleaning and flattening smaller areas or levelling loose materials such as gravel, ballast, ballast, etc.
- **Optional rubber guard:** if used in the public or in narrow areas, you can use the brush with a rubber guard for additional security. Can be mounted on either side.
- **Different couplings** available.
- **Low oil consumption.**

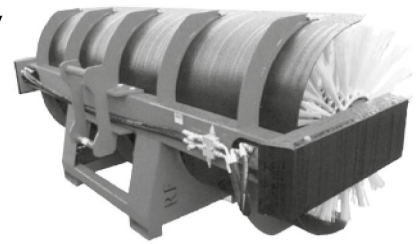

SKB



ROB

Sweeper Rollers SKB

Type	Bristle length (mm / in)	Rotor brush diameter (mm / in)	Weight (kg / lbs)	Length (mm / in)	Height (mm / in)	Width (mm / in)
SKB 10	300 / 35.43	900 / 35.43	280 / 616	1000 / 39.37	1200 / 4.24	1200 / 4.24
SKB 15	300 / 35.43	900 / 35.43	330 / 726	1500 / 59.06	1200 / 4.24	1200 / 4.24
SKB 20	300 / 35.43	900 / 35.43	380 / 836	2000 / 78.74	1200 / 4.24	1200 / 4.24
SKB 26	300 / 35.43	900 / 35.43	420 / 924	2600 / 102.36	1200 / 4.24	1200 / 4.24
SKB 30	300 / 35.43	900 / 35.43	475 / 1045	3000 / 118.11	1200 / 4.24	1200 / 4.24

Package consists of: sweeper roller, welded coupling

Rotor Brush ROB

Type	Rotor brush diameter (mm / in)	Weight (kg / lbs)	Length (mm / in)
ROB 20	900 / 35.43	170 / 374	1600 / 62.99

Package consists of: rotor brush, welded coupling

Requirements of Excavator

One hydraulic circuit needed

Operating pressure:

max. 20 MPa (200 bar) / 2880 psi

Pump capacity:

SKB: 40 - 150 l/min / 10.57 - 39.63 GPM


ROB: 30 - 60 l/min / 7.93 - 15.85 GPM

Different couplings available

Photos



ROB with steel bristles

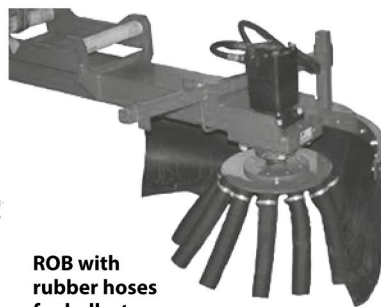

ROB with rubber hoses for ballast



ROB with plastic bristles



Exchangeable: plastic bristles for SKB 26



VIDEO ROB

